



EEEC173B/ECS152C

Spring 2009


Homework 1 (due April 14)

1. **(20%) Power limitation of mobile devices.** In order to reduce power usage, many cellular phones (as well as other wireless devices) have sleep modes. In such cases, a terminal can be in 1) sleep mode; 2) wake-up mode during which it receives control messages from the base station; or 3) transceiver mode when it transmits and receives a phone call. Assume that such a wireless device with 1 Amp-hour battery draws 1mA/~~minute~~ when in sleep mode, 5mA/~~minute~~ when in wake-up mode, and 250 mA/~~minute~~ in transceiver mode. Furthermore, let us assume that the duty cycle between wake-up and idle mode is 10%; that is, during 10 minutes when there is no phone call, the cell phone is in sleep mode for 9 minutes and in wake-up mode for 1 minute.
 - a) Determine the maximum amount of time the phone will work before recharging if the user leaves the phone on continually and receives one 3-minute call during a day. Now calculate this time before recharging if the phone is left on continually but the user receives one 3-minute call every hour.
 - b) Next, assume the duty cycle is equal to 50%; that is, during 10 minutes when there is no phone call, the cell phone is in sleep mode for 5 minutes. Redo part a) for this new duty cycle.
 - c) Finally, redo part (i) for a duty cycle of 80%.
2. **(35%) Frequency reuse in cellular network.** In class, it was stated that for hexagonal cells the ratio D/R is equal to $\sqrt{3N}$, where R = radius of the cell, D = distance between two cells where frequency is reused, and N is the cluster size, i.e., total number of frequencies in the system.
 - a) In this problem you are asked to prove this. In order to work out this proof, you need the following fact: for hexagonal cells that tessellate it is required that the cluster size, N , can only take on those values that satisfy the following condition:

$$N = i^2 + j^2 + ij$$

where i and j are non-negative numbers. To find the nearest co-channel neighbor of a particular cell, you have to (1) move i cells along any chain of hexagons and then (2) turn 60 degrees counter-clockwise and move j cells. Using this fact, plus the law of cosines prove that $D/R = \sqrt{3N}$ in a system of hexagonal cells.

- b) For an ideal hexagonal cellular layout which has identical cell coverage, what is the distance between the centers of two nearest co-channel cells for seven-cell reuse? For four-cell reuse?

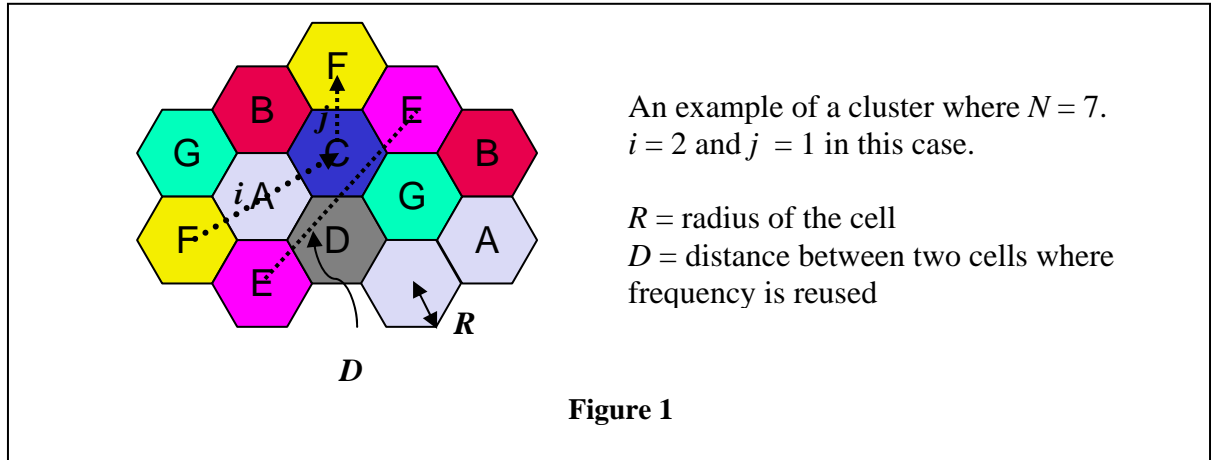

- c) A cellular service provider uses digital TDMA which can tolerate a C/I (co-channel interference) of 15 dB in the worst case. Considering only the first tier of interference, find the optimal value of N (assuming tessellating hexagonal cells) for omni-directional antennas and path loss exponent of 4.

Reminder: Assume a cell with radius R , and frequency reuse distance of D . Worst-case SIR happens when a user is at a cell boundary (distance R from the cell tower), and the interferer using the same frequency is of distance D away. For simplicity, assuming all interfering base stations are of equal distance from the mobile station.

3. **(20%) Thresholds for handoffs.** Suppose that a mobile station is moving along a straight line between base stations BS1 and BS2, as shown in Figure 2. The distance between the base station is $D=2000\text{m}$. For simplicity, assume small scale fading is neglected and the received power (in dBm) at base station I, from the mobile station, is modeled as a function of distance on the reverse link

$$P_{r,i}(d_i) = P_o - 10n \log_{10}(d_i / d_o) \text{ (dBm)} \quad i=1,2$$

where d_i is the distance between the mobile and the base station i , in meters. P_o is the received power at distance d_o from the mobile antenna. Assume that $P_o=0\text{dBm}$ and $d_o=1\text{m}$.

Let n denote the path loss which is assumed to be equal to 2.9.

Assume the minimum usable signal level for acceptable voice quality at the base station receiver is $P_{r,\min}=-88\text{dBm}$, and the threshold level used by the switch for handoff initiation is $P_{r,HO}$. Consider that the mobile is currently connected to BS1, and is moving toward a handoff (time required to complete a handoff, once that received signal level reaches the handoff threshold $P_{r,HO}$ is $\Delta t=4.5$ seconds).

- a) Determine the minimum required margin $\Delta = P_{r,HO} - P_{r,min}$ to assure that calls are not lost due to weak signal condition during handoff. Assume that the base station antenna heights are negligible compared to the distance between the mobile and the base stations.
- b) Describe the effects of the margin $\Delta = P_{r,HO} - P_{r,min}$ on the performance of cellular system.

